


Can Detect Metal
as Small as Clip



0-299
Sensitivity Level



20 min Quick
Assemble & Disassemble



Easy to Operate
with Big LCD Screen



Passenger
Flow Counter

12 ZONE DFMD

TW-D2121

- Double infrared detector, digital circuit design, anti-interference.
- Detect in 12 zones
- Sensitivities can be adjusted: sensitivity can be adjusted from 0 to 99. You can select the right sensitivity you want. For example, you can change the sensitivity to avoid inferences such as the coins, keys, buckle, etc.
- The function of statistics: show the number of passed examinees and the alarm times
- Easily to operate: The operation panel is covered by thin plastic, Bright light alarm can show the warning zone directly and find the precise position of the target metal.
- Both light and auditory alarms can make the warning clear. Improve work efficiency.
- No harm to people: The gate is harmless to people with cardiac pacemakers, pregnant women, tapes and videotapes.
- Installed conveniently: Integrated design, you can assemble or disassemble it in 20 minutes with the operation instruction.



(+91)-11-41916615
+91
9609749609



D-162, Okhla Phase-I, Okhla Industrial
Area, New Delhi, 110020



sales@timewatchindia.co
m
www.TimeWatchindia.com


Specification

General Specification	
Outer frame	2220mm(H) x820mm(W)x500mm(D)
Inner frame	2000mm(H)x700mm(W)x500mm(D)
Electrical current	AC100V~240V 50/60Hz
Power	10W
Unit weight	70KG
Signal Frequency	7000-8999Hz(adjustable)
Work Environment	-20C to +45C
Sensitivity Adjustable	Level 0-99
Alarm	Sound and light
Max Distance	0.3m at low sensitivity;0.5m at high sensitivity
Configuration	
Master Control Board	Metal-detect-door-mainbd, REV120
Digital keypad	A&C door panel board, REV030
Digital Display Location Board	A&C door zone board, REV030
Speaker	Loudspeaker,8 2W,Black,75mmx32mmx27mm
Weight	630kg
Software (Optional)	
Operation way	Remote control only
Sensibility	With the highest sensibility, it can detect the metal article as small as the clip. With the range of 0-100, they can be adjusted the Sensibility easily, pre-set the weight, volume, size and location in respect of the metal Articles and eliminate the false alarming for the coin, key, jewelry, leather belt button, etc.
Infrared counting	The intelligent counter can calculate the number of Passenger flows and the times of alarm.
Alarm settings	Twelve kinds of alarm sound



<p>Detecting Areas</p>	<p>Allocation of Twelve mutual over-lapping detecting areas, simultaneous alarming from multi-areas and accurately ascertaining the location of the metal articles according to the layout of the metal particles</p>
<p>Operating Environment</p>	
<p>Operation Temperature/Humidity</p>	<p>5 °C-40 °C/0%-90% (non-condensing)</p>
<p>Storage Temperature/Humidity</p>	<p>-20 °C-55 °C/0%-98% (non-condensing)</p>
<p>Operation Power</p>	<p>220V AC(±10%) 50±3Hz (Optional: 100V AC, 110V AC, 120V AC, 200V AC)</p>

Dimensional Drawing

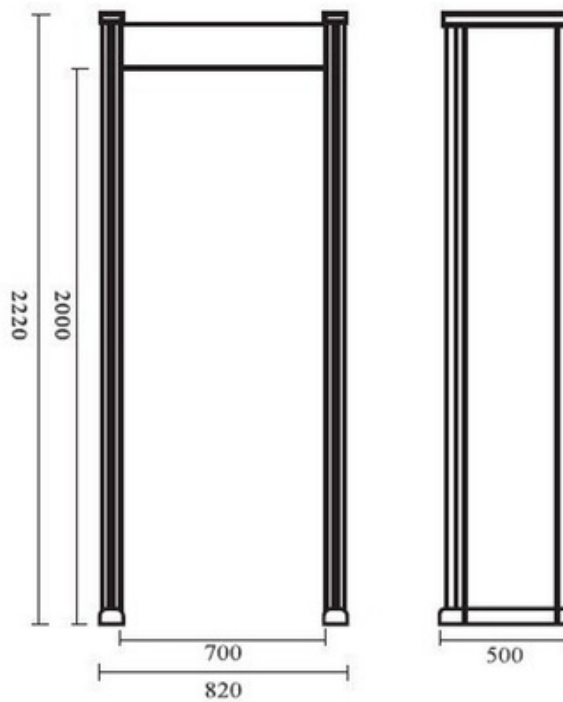

Head Office: D-162, Okhla Phase-I, Okhla Industrial Area, New Delhi, 110020

Regional Offices: Mumbai, Bangalore, Ahmedabad,

International Office: Qatar (Middle East)

Phone: +91-959 995 3921

Sales: sales@timewatchindia.com,

Support: helpdesk@timewatchindia.com

Dealership: partners@timewatchindia.com

Disclaimer: All pictures shown are for illustration purposes only. The actual product and color may vary due to product enhancement. The brief specification is mentioned and may change without prior notice. Please consult us before placing any order.